



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>G01N 21/03, B01L 3/14</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/43622</b> <b>(43) International Publication Date:</b> 20 November 1997 (20.11.97)
<b>(21) International Application Number:</b> PCT/IT97/00111 <b>(22) International Filing Date:</b> 13 May 1997 (13.05.97) <b>(30) Priority Data:</b> FI96A000114 16 May 1996 (16.05.96) IT <b>(71) Applicant (for all designated States except US):</b> DIESSE DIAGNOSTICA SENESE S.R.L. [IT/IT]; Via San Vittore, 36/1, I-20133 Milano (IT). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> RICCI, Antonio [IT/IT]; Località Caggio, 44, I-53035 Monteriggioni (IT). COCOLA, Francesco [IT/IT]; Località Ancaiano, Podere Casanova, 136, I-53018 Sovicille (IT). <b>(74) Agents:</b> MANNUCCI, Gianfranco et al.; Via della Scala, 4, I-50123 Firenze (IT).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> A TEST TUBE FOR BIOLOGICAL ANALYSES OF ORGANIC LIQUIDS USING ELECTRO-OPTICAL EQUIPMENT		
<b>(57) Abstract</b>		
<p>The test tube comprises a container body (1) with a cavity (3) which is essentially prismatic and has an essentially rectangular cross section, a cylindrical connecting part (5) for filling, and a flat laminar zone (7) developed as an extension of one of the walls of the said cavity. Information which can be read optically, such as bar codes or the like, may be accommodated on this flat laminar zone (7).</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A test tube for biological analyses of organic liquids  
using electro-optical equipment

Description

5    Technical Field

The invention relates to a test tube for biological analyses of organic liquids using electro-optical equipment in general, such as photometers, for example, used for sedimentation velocity (ESR) analyses and the like.

10   Background Art

Single-use test tubes are known which are made of synthetic resin and have a tubular structure, as are other types which have a substantially prismatic cavity with a rectangular cross-section, the two larger walls of which  
15   are passed through by the rays which allow the electro-optical analysis. All these test tubes do not offer available surfaces for adopting the so-called bar codes used to read data relating to the tests and to the person whose liquids are being analysed; the use of labels and/or  
20   symbols and manually written information is not practical, is likely to give rise to errors and requires a considerable amount of time.

Objects and Disclosure of the Invention

The object of the invention is to overcome the  
25   aforementioned drawbacks and provides other objects and advantages which will become obvious from a reading of the text which follows.

Basically, the test tube in question - having a container body with a liquid-containing cavity defined by  
30   walls comprising zones located opposite one another and capable of being passed through by the rays of an optical analysing system, and a connecting part for filling and closing - according to the invention is characterized in that it comprises moreover at least one surface, which is  
35   developed so as not to interfere with said zones located

opposite one another and on which surface information which can be optically read, such as bar codes or the like, may be accommodated.

5 Said surface or surfaces and said container body may have, in cross-section, a form contained in a circular volume so as to be suitable for use with equipment having seats with a circular section.

According to an embodiment, the test tube may have a container body with a cavity which is substantially  
10 prismatic and has a substantially rectangular cross-section, and a cylindrical connecting part for filling, and may have at least one surface projecting from said container body. Said surface may be a portion of a cylindrical wall, also forming one of the walls of the  
15 container body. Alternatively, the said surface may be formed by a flat laminar zone projecting from the said container body. In a further alternative, the said surface is formed by a flat laminar zone developed as an extension of one of the walls of the said cavity parallel to the  
20 direction of the rays of an optical analysing system; said laminar zone may be developed symmetrically on opposite sides of the substantially prismatic cavity; the longitudinal edges of said laminar zone and an additional projection located at a distance from said edges may define  
25 a volume of the test tube contained and centred in a cylindrical housing; also the said projection may be longitudinally developed along the plane of symmetry perpendicular to said laminar zone.

According to other possible embodiments, the container  
30 body is cylindrical and has at least one surface projecting from said container body. Said surface may be formed by at least one flat laminar zone projecting from said cylindrical container body; said flat laminar zone may project tangentially from the cylindrical body or may  
35 project on opposite sides of the cylindrical body. The

test tube may also comprise two flat laminar zones which are essentially parallel and spaced from one another.

Yet another test tube may comprise a container which has a substantially prismatic shape with a rectangular cross-section, and a bar code may be applied onto at least one of the walls essentially parallel to the rays of the optical analysing system.

The invention also relates to an apparatus for analyses of the type for determining the sedimentation velocity of particles in organic liquids, comprising means for receiving a plurality of test tubes and comprising optical reading means mounted on a slide designed to travel along the test tubes which are housed inside the apparatus. For use of the tests tubes described above, such an apparatus is characterized in that it comprises on said slide also means for reading data, such as a bar code, located on the carrying surface of these test tubes. The said data reading means are advantageously positioned so as to perform reading in a direction parallel to the walls of the test tube passed through by the rays of the optical analysing system. Each of the seats designed to contain the test tubes has a longitudinal opening designed to allow reading - by the reading means - of a bar code applied onto one of the surfaces of the test tube.

In any case, the test tube according to the invention offers the possibility of using an ample flat surface for receiving bar codes and other data useful for the operations for which the test tube is used.

#### Brief Description of the Drawings

The invention will be more clearly understood with reference to the description and the accompanying drawing, which shows a practical non-limiting embodiment of the invention. In the drawing:

Figs. 1 and 2 show a front and a side view respectively of a test tube according to the invention,

partially sectioned;

Figs. 3 and 4 show a section and a view of the test tube on transverse planes indicated by III-III and IV-IV in Fig. 2, respectively;

5 Figs. 5 to 15 show - similarly to Fig. 3 - possible variants of the test tube.

#### Detailed Description of Preferred Embodiments

With reference to Figures 1 to 4, the test tube 1 comprises a container body with a cavity 3 which is  
10 substantially prismatic and has a substantially rectangular cross-section and with a cylindrical connecting part 5 for filling and closing by means of a stopper not shown in the drawing. The prismatic cavity 3 has, corresponding to the  
15 long sides of its cross-section, walls 3A, 3B (Figs. 1 and 3) which are flat and of more or less constant thickness, except for a slight variation of the internal dimension of cavity 3 for removal of the test tube from the  
manufacturing mould, the test tube being preferably formed using transparent plastic. These walls 3A, 3B are designed  
20 to be passed through perpendicularly, in the direction of the arrow F (Fig. 3), by the light rays of an electro-optical analysing system.

The test tube also comprises a flat laminar zone 7, developed as an extension of one of the walls of the said  
25 cavity 3 parallel to the direction F of the rays of the optical analysis system. This flat laminar zone 7 is capable of receiving information which can be read using reading means for example of the optical type, such as a bar code or the like. Advantageously the said laminar zone  
30 7 extends symmetrically on opposite sides of the essentially prismatic cavity.

In a preferred embodiment, the longitudinal edges 7A, 7B of said laminar zone and an additional longitudinal projection 7C located at a distance from said edges define  
35 a volume of the test tube such as to be able to centre the

test tube itself inside a cylindrical housing. The said longitudinal projection 7C may be developed along a plane of symmetry perpendicular to said laminar zone 7. All this makes it possible to achieve effective centring of the test tube in the seats provided in the analysing equipment.

In any case the test tube offers the possibility of using an ample flat surface 7 for receiving bar codes and/or other data useful for the operations for which the test tube is used.

Figs. 5 to 15 show cross-sections of further possible embodiments of test tubes which have requirements equivalent to those of the test tube already described. These test tubes have at least one surface capable of receiving the information, such as the surface 7, and a volume contained within a circular profile (viewed in cross-section); moreover, the containing space of the body of the test tube may be analysed by a beam of rays which pass through it, being defined with flat or also curved walls, as far as a circular cross-section.

It is understood that the drawing shows only an example provided by way of a practical demonstration of the invention, it being possible to vary the forms and arrangements thereof without thus departing from the scope of the idea underlying the invention itself. The presence of any reference numbers in the accompanying claims has the purpose of facilitating reading of the claims with reference to the description and to the drawing, and does not limit the scope of protection represented by the claims.

Claims

1. Test tube for biological analyses of organic liquids using electro-optical equipment in general, having  
5 a container body with a liquid-containing cavity defined by walls comprising zones located opposite one another and capable of being passed through by the rays of an optical analysing system, and a connecting part for filling, characterized in that it comprises moreover at least one  
10 surface, which is developed so as not to interfere with said zones located opposite one another and on which surface information which can be optically read, such as bar codes or the like, may be accommodated.

2. Test tube according to Claim 1, characterized in  
15 that said surface or surfaces and said container body have, in cross-section, a form contained in a circular volume.

3. Test tube according to Claim 1 or 2, in which the container body (1) has a cavity (3) which is essentially prismatic and has an essentially rectangular cross-section,  
20 and a cylindrical connecting part (5) for filling, characterized in that it has at least one surface projecting from said container body.

4. Test tube according to Claim 1 or 2 or 3, characterized in that said surface is a portion of a  
25 cylindrical wall, also forming one of the walls of the container body (Fig. 7).

5. Test tube according to Claim 1 or 2 or 3, characterized in that said surface is formed by a flat laminar zone projecting from the said container body.

30 6. Test tube according to Claim 1 or 2 or 3, characterized in that said surface is formed by a flat laminar zone (7) developed as an extension of one of the walls of the said cavity parallel to the direction (F) of the rays of an optical analysing system.

7. Test tube according to Claim 6, characterized in that said laminar zone (7) extends symmetrically on opposite sides of the essentially prismatic cavity (3).

8. Test tube according to Claims 6 or 7,  
5 characterized in that the longitudinal edges (7A, 7B) of said laminar zone and an additional projection (7C) located at a distance from said edges define a volume of the test tube contained and centred in a cylindrical housing.

9. Test tube according to Claim 8, characterized in  
10 that said projection (7C) is longitudinal and is developed along the plane of symmetry perpendicular to said laminar zone (7).

10. Test tube according to Claim 1 or 2 or 3,  
15 characterized in that the container body is cylindrical and has at least one surface projecting from said container body.

11. Test tube according to Claim 10, characterized in that said surface is formed by at least one flat laminar zone projecting from said cylindrical container body.

20 12. Test tube according to Claim 11, characterized in that said flat laminar zone projects tangentially from the cylindrical body.

13. Test tube according to Claim 12, characterized in that said flat laminar zone projects on opposite sides of  
25 the cylindrical body.

14. Test tube according to at least Claim 11, characterized in that it comprises two flat laminar zones which are essentially parallel and spaced from one another.

15. Test tube according to Claim 1, with a container  
30 body which has an essentially prismatic shape and a rectangular cross-section, characterized in that a bar code is applied onto at least one of the walls essentially parallel to the rays of the optical analysing system.

16. Apparatus for carrying out analyses of the type  
35 for determining the sedimentation velocity of particles in

organic liquids, comprising means for receiving a plurality of test tubes and comprising optical reading means mounted on a slide designed to travel along the test tubes which are housed inside the apparatus, characterized in that it  
5 comprises on said slide also means for reading data, such as a bar code, located on the carrying surface of these test tubes.

17. Apparatus according to Claim 16, characterized in that said data reading means are positioned so as to  
10 perform reading in a direction parallel to the walls of the test tube which are passed through by the rays of the optical analysing system.

18. Apparatus according to Claim 16 or 17, characterized in that each of the seats designed to contain  
15 the test tubes has a longitudinal opening designed to allow reading - by the reading means - of a bar code applied onto one of the surfaces of the test tube.

FIG. 1

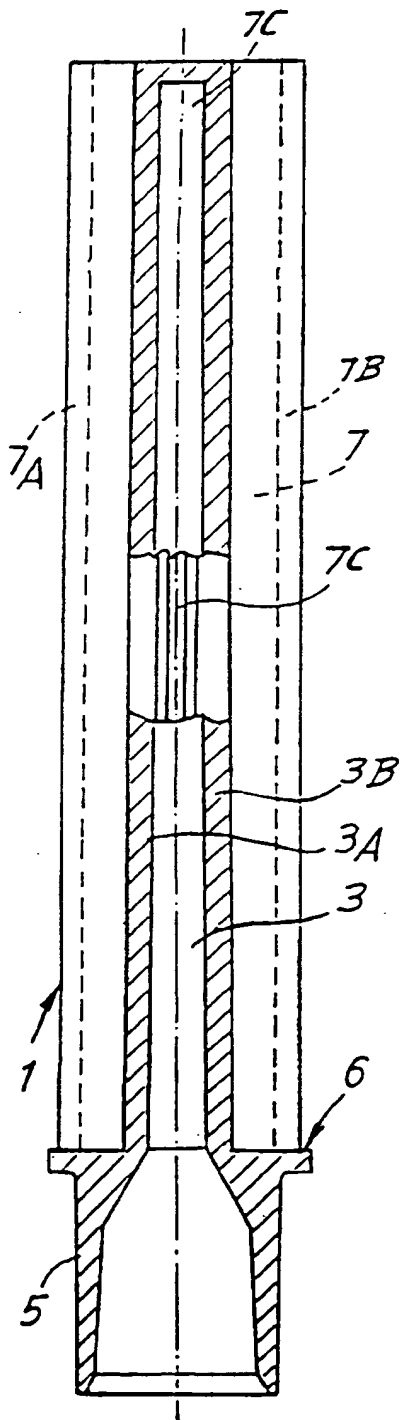


FIG. 2

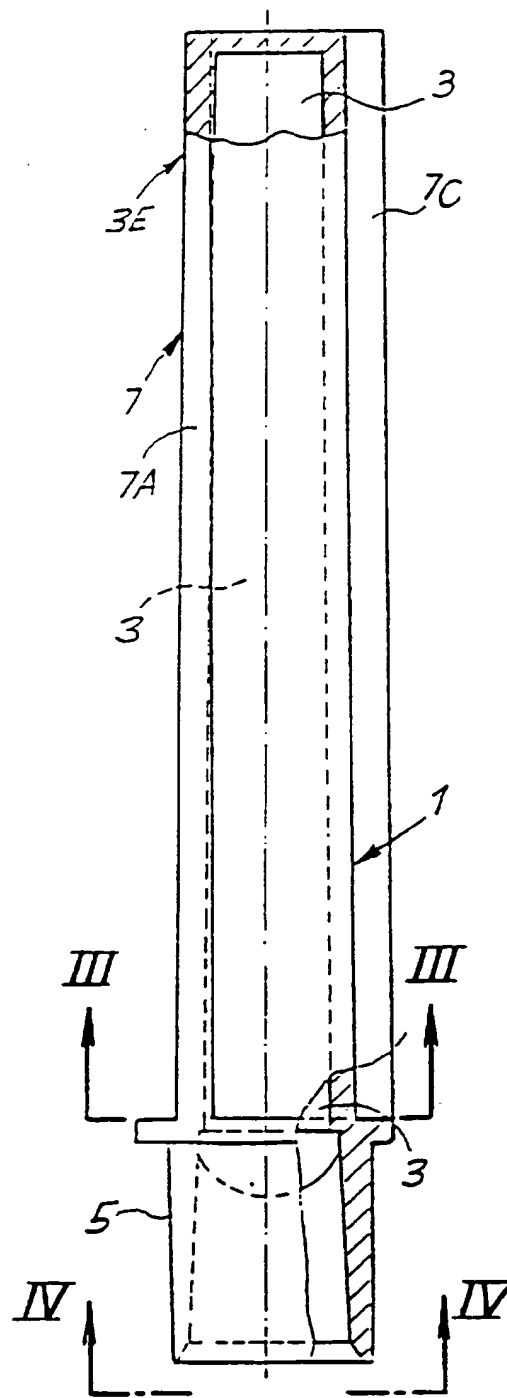


FIG. 3




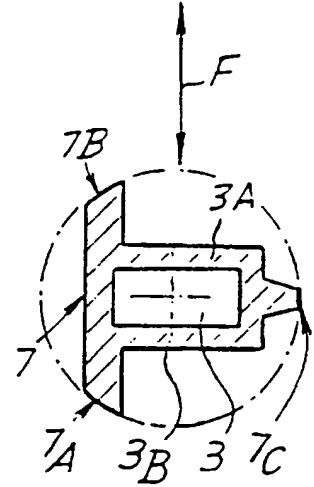


FIG. 4




2/2

**FIG. 5**




**FIG. 6**


**FIG. 7**




**FIG. 8**




**FIG. 9**




**FIG. 10**




**FIG. 11**




**FIG. 12**




**FIG. 13**



**FIG. 14**



**FIG. 15**



## A. CLASSIFICATION OF SUBJECT MATTER

IPC:6 G01N21/03 B01L3/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01N B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 90 05903 A (MEDICAL LABORATORY AUTOMATION) 31 May 1990	1,2,5
A	see page 4, paragraph 12 - page 5, paragraph 2 see page 7, paragraph 2 see page 9, paragraph 2 - page 11, paragraph 1; figure 1 ---	16
X	US 5 128 104 A (MURPHY HAROLD R ET AL) 7 July 1992 see column 4, line 45 - column 6, line 38; figure 1 ---	1-3
X	EP 0 192 968 A (ALLIED CORP) 3 September 1986	1,2
A	see page 7 - page 8; figure 4 ---	3,16
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 August 1997

Date of mailing of the international search report

22/08/1997

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Tabellion, M

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 97/00111

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 710 874 A (CINQUALBRE PAUL-HENRI) 1 December 1987 see column 1 - column 3; figure 1 -----	16
A	US 4 528 159 A (LISTON MAX D) 9 July 1985 see column 5 - column 6; figure 2 -----	1,16

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 97/00111

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9005903 A	31-05-90	US 5098661 A AU 641130 B AU 4650489 A CA 2003002 A DE 68914467 D DE 68914467 T EP 0444136 A ES 2051008 T US 5359184 A	24-03-92 16-09-93 12-06-90 16-05-90 11-05-94 28-07-94 04-09-91 01-06-94 25-10-94
US 5128104 A	07-07-92	EP 0746754 A WO 9325889 A	11-12-96 23-12-93
EP 0192968 A	03-09-86	US 4764342 A CA 1281975 A DE 3685342 A	16-08-88 26-03-91 25-06-92
US 4710874 A	01-12-87	FR 2566126 A DE 3520962 A GB 2176596 A, B	20-12-85 19-12-85 31-12-86
US 4528159 A	09-07-85	CA 1199258 A AU 553772 B AU 8823382 A CA 1192421 A EP 0085700 A WO 8300296 A	14-01-86 24-07-86 17-03-83 27-08-85 17-08-83 03-02-83